## The roofing system that offers new options for today's metal roofing customer.

Horizon S brings value, beauty and performance together while offering a superior roofing choice for residential and light commercial applications. The value is clear in the substrate and finish, featuring 26 gauge high strength Galvalume steel, Energy Star approved standard colors and 10 layers of protection provided by the Enduracote® paint system. Performance stands out with the proven snap together design, standard shadow lines and standard factory applied sealant.

Horizon S offers a look for every style and is made to withstand the elements; it is weather, wind, fire, insect and hail resistant. You will appreciate the value Horizon S offers as the years accumulate with little or no maintenance costs.

For great looks, maximum performance and installation that's a snap, choose Horizon S.

16" Coverage

1"
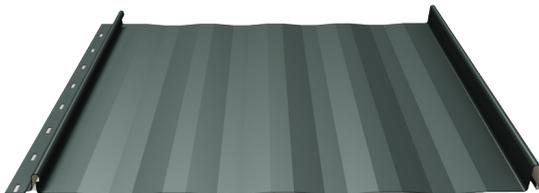
- Light weight, energy efficient and fire resistant

- Easy to install - can be installed over solid decking or over an existing shingle roof with furring strips

- Snap together design with pre-punched fastener slots

- Fade-resistant Enduracote® paint system with a lifetime finish warranty for many years of low maintenance beauty

- Shadow lines to enhance appearance

- Factory applied sealant is standard for optimum weathertightness

- 16" standard coverage; custom cut to lengths

ENERGY STAR PARTNER

Evergreen 875	Brick Red 898
Antique Bronze 854	Classic Burgundy 853
Light Gray 850	Charcoal Gray 851
True Black 882	Bright Copper Penny 939
	Acrylic Coated Galvalume®

FABRAL®
Horizon S 100
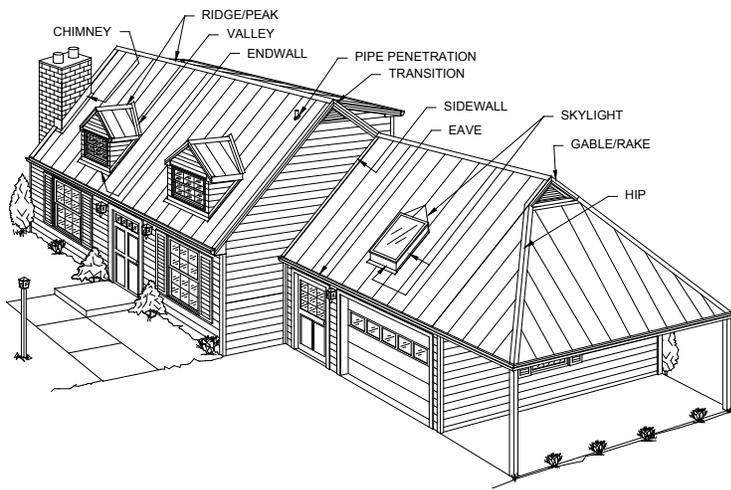
Fasteners
- #10-12 Wafer Head
- #14 x 1" Mill Point
- #12 x 3/4" Stitch Screw
- #9 x 1" Woodgrip

WEF2
2" 1"

WEF1
4 1/4"
2"
135°

WEF3
5"

"Eave Flashings"

WEW2
2 15/16"
5"

"Endwall Flashing"

WSW4
3 1/2"
1"
3/4"
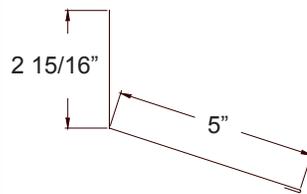
"Sidewall Flashing"

WVC1
1"
1"

"Valley Cleat"

WJC2
1"
1 3/4"
3"

"J-Channel Flashing"

WGF4
1 1/2"
3/4"
5 1/16"

"Gable Flashing"

WRH4
5 3/16"
70°
5 1/16"

"Monoslope Ridge Flashing"

RV2
1"
9"
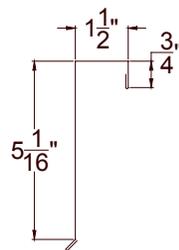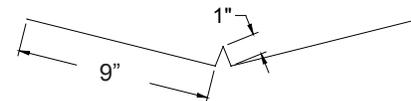
"Valley Flashing"

WRH3
2 3/4"   2 3/8"   1/2"

WRH5
4"
3 7/16"
1/2"
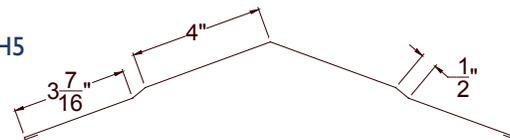
"Standard Ridge Flashings"

16" Coverage
1"

MODIFIED WTF1
6"
9 1/2"
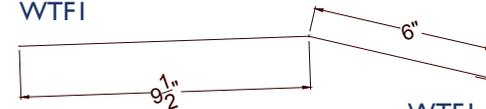
SPECIFY ANGLE
"Gambrel Flashing"

WTF1
8 1/2"
7"
BREAK TO PITCH
OPEN HEM
3/4"

"Transition Flashing"

FABRAL®

98-32-086   10/13