




## A Classic Design featuring Beauty & Durability

Get the classic look of standing seam metal roofing in 24 gauge steel from Fabral. The 1 1/2" SSR Standing Seam panel is always a smart choice for residential or commercial construction or re-roofing applications. Its narrow batten seams offer aesthetic elegance, while its clips provide ease of installation and thermal movement. Fabral's 1 1/2" SSR is designed to perform at optimum levels year after year, providing excellent durability in all types of weather including rain, wind and snow.

1 1/2" SSR is available in nine specially formulated Enduracote® paint colors and Acrylic Coated Galvalume with a full line of complementary trim and accessories available - all of which are ENERGY STAR® approved.

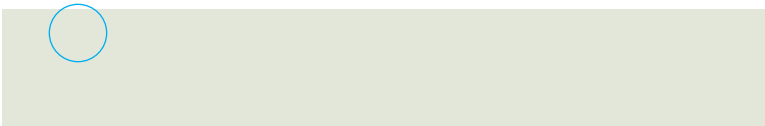

White (899)



Evergreen (875)



Caribbean Blue (881)



Brick Red (898)



True Black (882)



Hickory Moss (870)



Charcoal Gray (851)



Antique Bronze (854)



Classic Burgundy (853)



Acrylic Coated Galvalume

Colors shown are as close to actual colors as allowed by the printing process. Actual metal samples are available; request samples prior to installation. Note: colors vary depending on position and angles. Due to product improvements, changes and other factors, FABRAL reserves the right to change or delete information here-in without prior notice.

\*All colors are ENERGY STAR® approved.



## 1 1/2" SSR Features:

- Classic Design
- High Performance System
- Clip System Allows for Thermal Movement
- Lifetime Limited Paint Warranty
- Ideal for New and Re-Roofing Applications
- Energy Star Approved Colors

**ENDURACOTE**   
PREMIUM DEFENSE  
Against the Elements

Enduracote® is a premium paint system with exceptional performance to the next level. Based on cutting edge resin technology, this system offers unbeatable durability and superior long-term performance against the elements. Enduracote is the choice for low maintenance, lasting beauty and outstanding value.



### Warranty:

Lifetime film integrity warranty for walls and roofs  
30-year warranty against fade and chalk for walls and roofs  
20-year non-perforation warranty

To reduce the likelihood of oil canning, install an ethofoam backer rod under the center of the panels prior in installation.

### Product Specifications:

- Minimum pitch recommended 1:12
- 16" coverage with 1 1/2" seam height
- 24 gauge high strength galvalume steel
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- UL 580 Class 90 Uplift Test Rating
- Energy Star® approved colors
- Concealed clip fastening system allows for thermal movement
- Factory applied sealant
- Shadow lines standard to enhance appearance (can be ordered without shadow lines, specify at time of order)
- Custom cut to lengths up to 40
- Open span up to a maximum 24" on Center Purlins or Furring
- Minimum two screws per clip; max clip spacing 24" center to center
- Strippable Film for protection in shipping

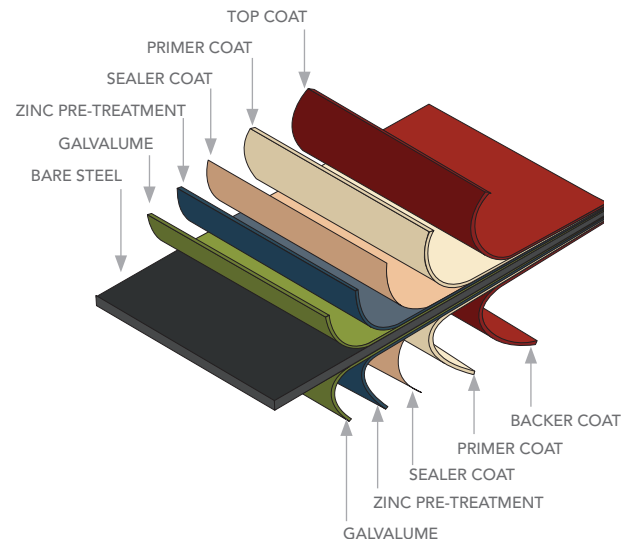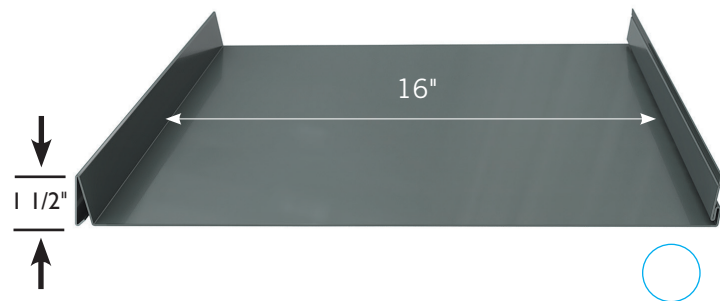

Galvalume is the trademark of BIEC International Inc.

© Fabral 2015. All rights reserved.

Fabral.com  
800.477.2741

**FABRAL**  
METAL WALL AND ROOF SYSTEMS

© 2015 Fabral  
98-32-085 3/15